



Indoor 2.5mm pitch SPEC.

	Model Name	IE025R
	Model Code	LH025IERKLS
	Specification	Indoor
Physical Parameter	Pixel Pitch	2.5 mm
	Pixel Configuration	1 red, 1 green, 1 blue
	Configuration (LxH, per cabinet)	384x216 pixels
	Diode Type	Surface Mount Device (SMD)
	Dimensions (mm, LxHxD, per cabinet)	960x540x63.1mm
	Dimensions (inch, inchxD, per cabinet)	43.3 inch x 3.13 inch
	Weight (per cabinet)	10.7kg
Optical Parameter	Brightness (Peak/Max) ⁽¹⁾	1,200 nit / 600 nit
	Contrast Ratio (Peak/Max) ⁽¹⁾	8,000:1 / 4,000:1
	Viewing Angle - Horizontal	160° (TBD)
	Viewing Angle - Vertical	160° (TBD)
	Bit Depth	16bit per Color
	Color Temperature - Default	6,500K
	Color Temperature - Adjustable	2,800 ~ 10,000K (use S/BOX)
Electrical Parameter	Video Rate	50/60 Hz
	Input Power Range	100~240 VAC, 50/60 Hz
	Power Consumption - Max	289 (W/m ²) / 150 (W/Cabinet) (TBD)
	Power Consumption - Typ	232 (W/m ²) / 120 (W/Cabinet) (TBD)
	Heat Generation - Max (BTU/SF)	511.5 (TBD)
	Refresh Rate	3,840 Hz
Operation Conditions	Working Temperature/Humidity	0°C~40°C / 10~80%RH
	Working Temperature/Humidity	-20°C~45°C / 5~95%RH
	IP Rating	IP20
	LED Lifetime	50,000 hours
Certification	Certification	EMC Class A, Safety 60950-1
Service	Service	Front
Package	Weight (kg, per cabinet)	10.8kg

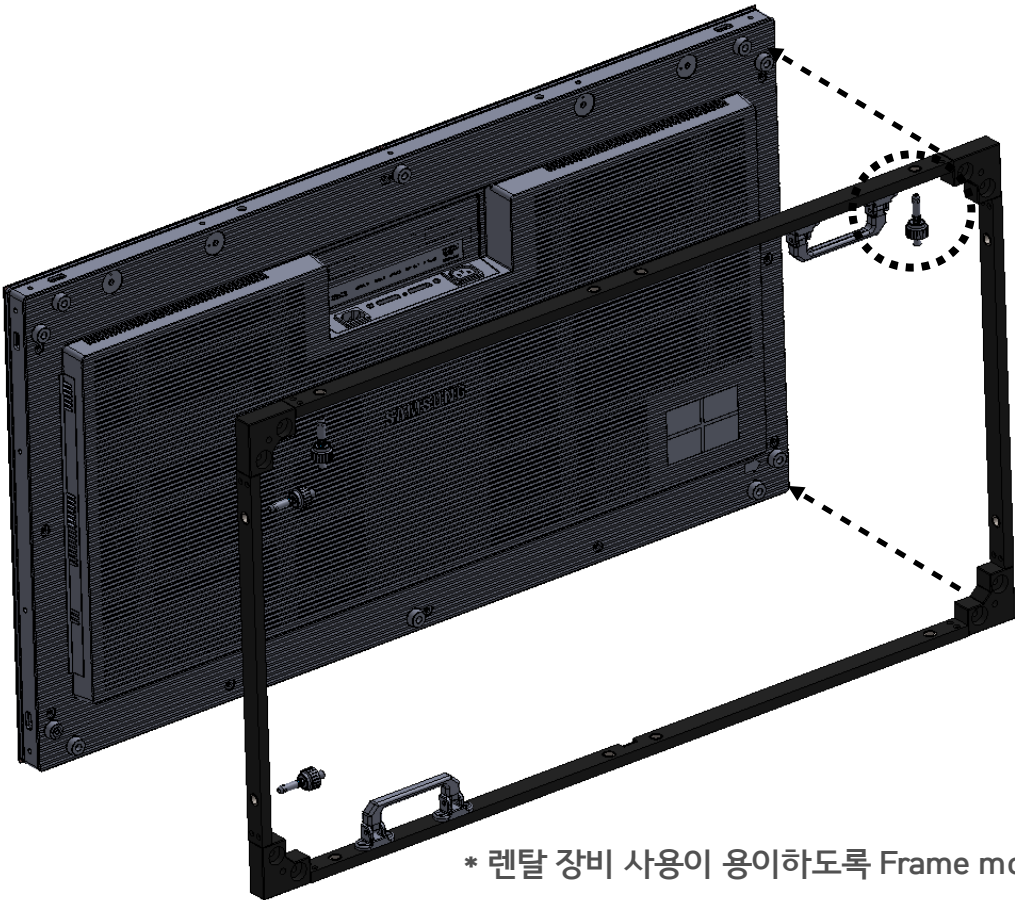

* 렌탈 장비 사용이 용이하도록 Frame modify
* 장비 설치 시 쉬운 설치 철수

Cabinet Dimension	960 x 540 mm
Aspect Ratio	16:9
Inch	43"
Installation	Landscape / Portrait Full Front SVC

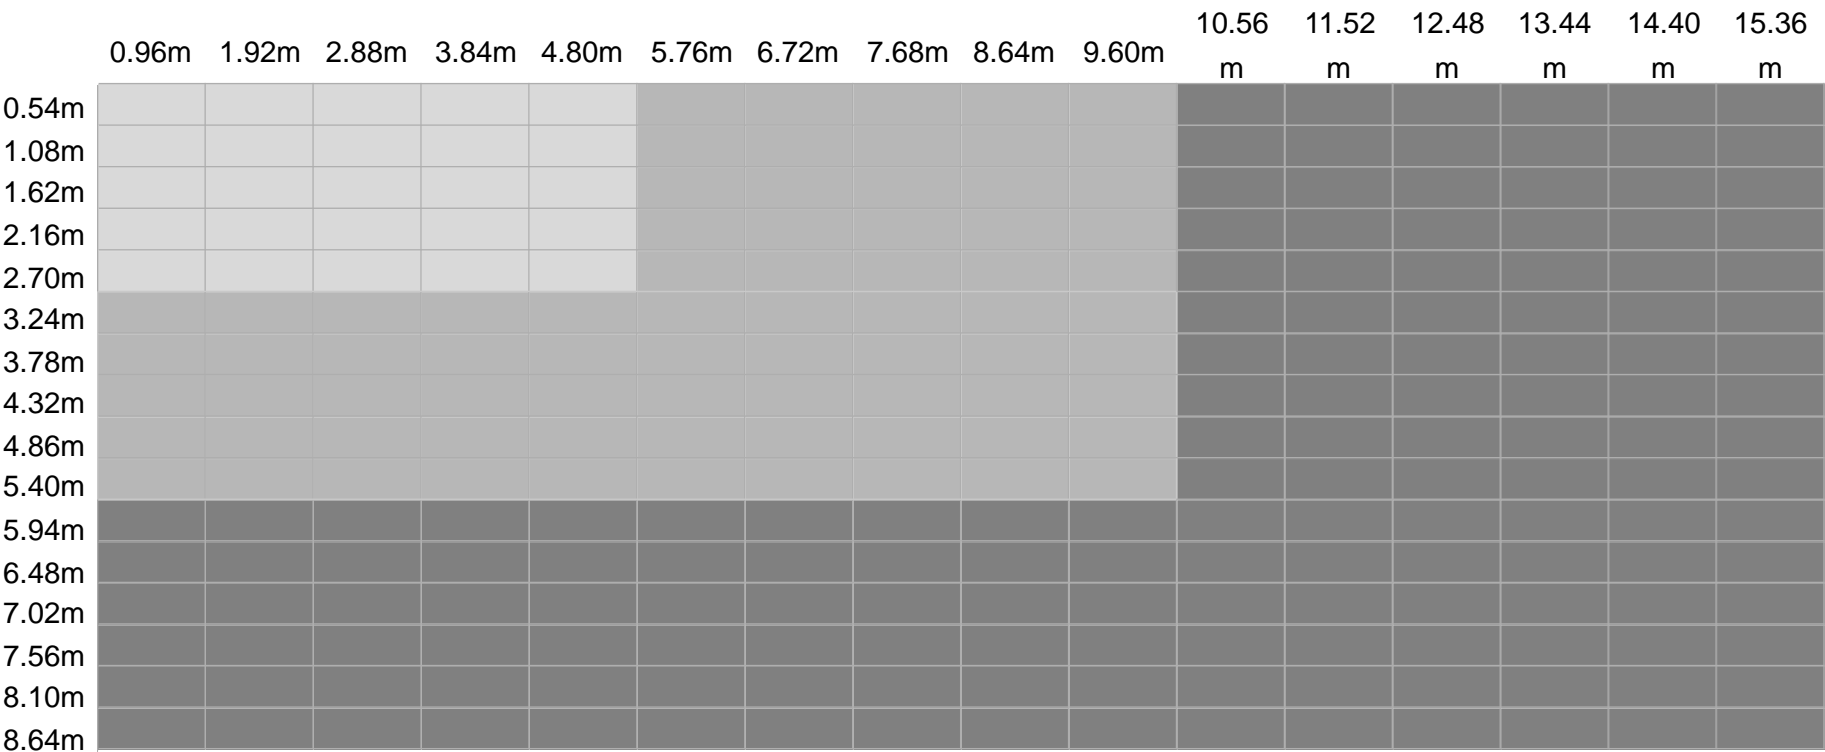

	1X1	2X2	3X3	4X4	5X5	6X6	7X7	8X8	9X9	10X10	11X11	12X12	13X13	14X14	15X15	16X16
P2.5	384X216	768X432	1152X648	1536X864	1920X1080	2304X1296	2688X1512	3072X1728	3456X1944	3840x2160	4224x2376	4608X2592	4992X2808	5376X3024	5760X3240	6144X3456